# panconnect•

MODULAR

LITE

LITE is a basic panel for modular installation available in two sizes, which covers the majority of standard needs in meeting rooms, training rooms, and conference rooms where simplicity and robustness are primarily required. It can be used as a combination of sockets and modules or as a fully socketed version. Both models can also be equipped with 60W USB-C/A charging. The modular slots can be customized with our all-metal modules with connectors, as well as retractable cables or pass-throughs for permanently extended cables.

Configurable with connectors and cables

Combination of sockets and modules

Available with USB-A QC & USB-C 60W PD

Metal body with durable painting

Focus on price and durability

Supports wide range of socket standards

FRENCH type E	SCHUKO type F	UNI VERSAL	ITALY type L	DENMARK type K	SWISS type J	GB type G	US type B

LITE

pancconnect•

LITE M

LITE M offers variability from charging only to combination of connectors and pull out cables.

Dimensions (mm)	Weight (g)	Product package (mm / kg)
227,5 × 73 × 81	1200	360 × 200 × 100 / 1,5

Number of sockets	USB-C/A 60W charging	Power cable
1 – 4	0 – 1	2.9m, ending with a plug 25cm WIELAND or WINSTA mini

Number of modules	CUT-OUT(mm)	
0 – 2	222,5 × 62	

LITE L

LITE L comes in sockets only variant or in combination of a socket, connector field and USB-C/A charging.

Dimensions (mm)	Weight (g)	Product package (mm / kg)
279 × 73 × 81	1400	360 × 200 × 100 / 1,7

Number of sockets	USB-C/A 60W charging	Power cable
1 – 5	0 – 1	2.9m, ending with a plug 25cm WIELAND or WINSTA mini

Number of modules	CUT-OUT (mm)	
0 – 3	265 × 62	

LITE

panconnect.

COLOURS

LITE is always offered as a fully painted panel, including the bottom cover and mounting frame.

WHITE
white coating, finely textured surface, fitting RAL 9003

BLACK
black coating, resistant smooth matt surface, fitting RAL 9005

SILVER
silver metallic, resistant matt surface, fitting RAL 9006

TECHNICAL DETAILS

Main attributes for all sizes of panel LITE

USB-C CHARGING SPECIFICATION
PowerDelivery protokol up to 60W

USB-A CHARGING SPECIFICATIONS
QuickCharge 3.0 (up to 5A)

SOCKET
230V/10A (EU), 110V/10A (US)

POWER SUPPLY
110 - 250V, 10A

MATERIALS
dural, stainless steel, steel, ABS plastics (sockets)

INGRESS PROTECTION
IP22

AVAILABLE IN THIS VERSION FROM
2023

POWER CABLES

Panels are always supplied with integrated power cable.

Cable with standard plug type
2.9 meter long cable (not available for US standard)

WINSTA mini
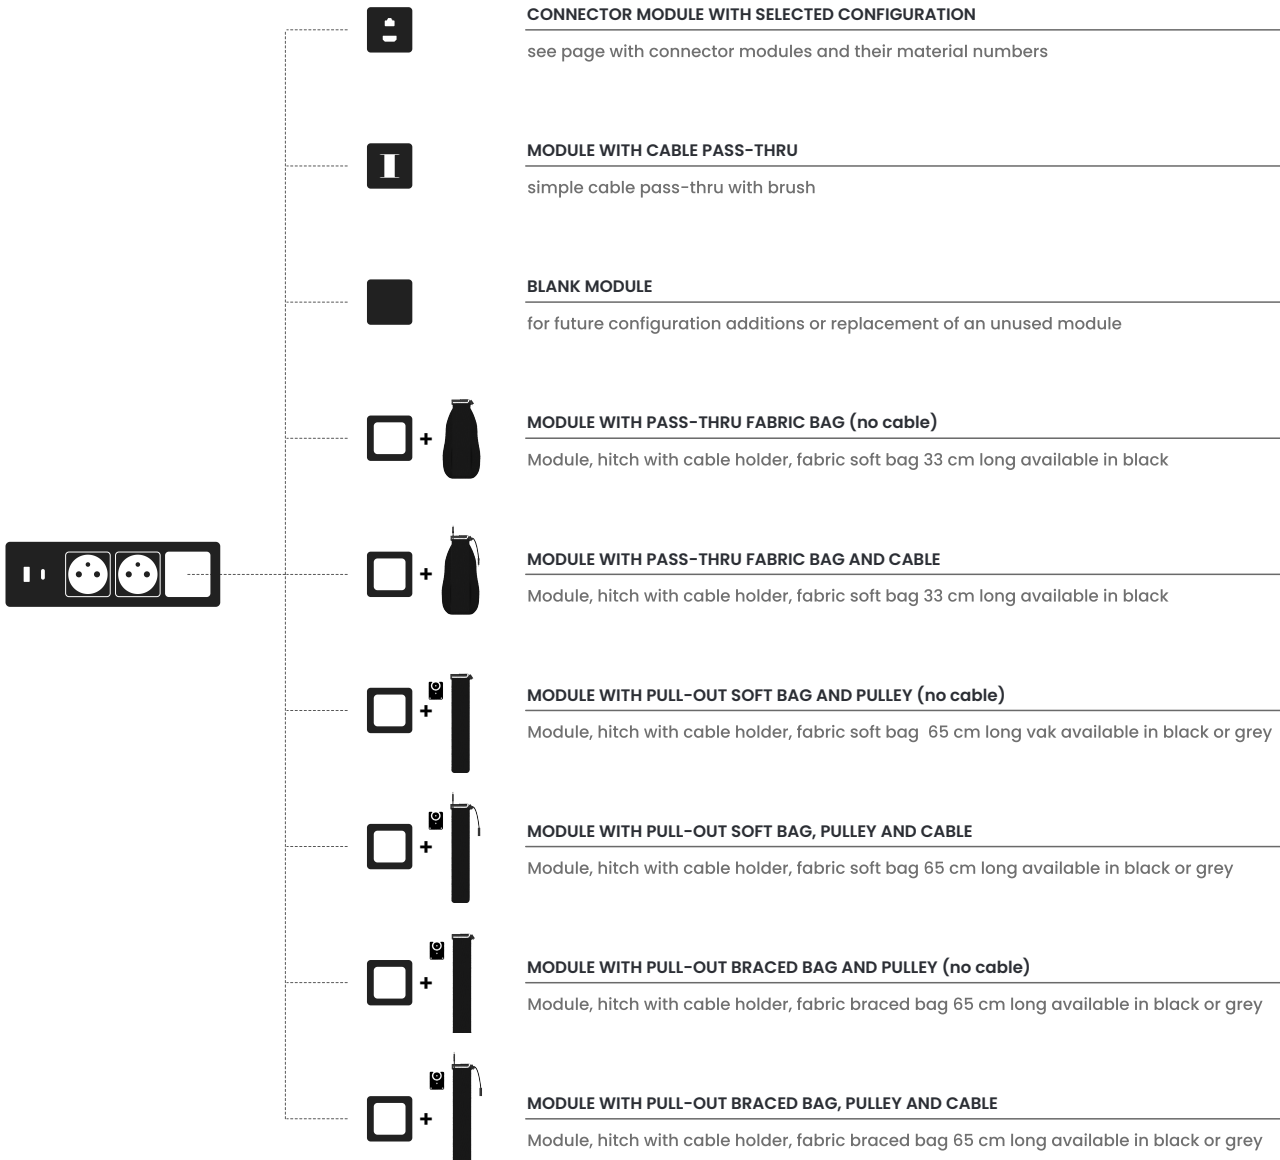25 cm long pigtail cable with connector (male, 2+PE, 10A)

WIELAND GST18i3
25 cm long pigtail cable with connector (male, 2+PE, 10A)

LITE

panconnect•

HOW TO CONFIGURE PANEL LITE

LITE can be configured purely using individual modules, both connector-based and cable-based. The modules are supplied separately.

CONNECTOR MODULE WITH SELECTED CONFIGURATION

see page with connector modules and their material numbers

MODULE WITH CABLE PASS-THRU

simple cable pass-thru with brush

BLANK MODULE

for future configuration additions or replacement of an unused module

MODULE WITH PASS-THRU FABRIC BAG (no cable)

Module, hitch with cable holder, fabric soft bag 33 cm long available in black

MODULE WITH PASS-THRU FABRIC BAG AND CABLE

Module, hitch with cable holder, fabric soft bag 33 cm long available in black

MODULE WITH PULL-OUT SOFT BAG AND PULLEY (no cable)

Module, hitch with cable holder, fabric soft bag 65 cm long vak available in black or grey

MODULE WITH PULL-OUT SOFT BAG, PULLEY AND CABLE

Module, hitch with cable holder, fabric soft bag 65 cm long available in black or grey

MODULE WITH PULL-OUT BRACED BAG AND PULLEY (no cable)

Module, hitch with cable holder, fabric braced bag 65 cm long available in black or grey

MODULE WITH PULL-OUT BRACED BAG, PULLEY AND CABLE

Module, hitch with cable holder, fabric braced bag 65 cm long available in black or grey

CABLE SYSTEM FOR PANEL LITE

PASS-THRU FABRIC BAG

A simple sewn bag, 32 cm in length, with a metal handle for attaching to the panel module. The bag combines durable fabric with a PVC coating and flexible mesh for maximum protection of extended cables under the table.

PULL-OUT WITH SOFT BAG AND PULLEY

A textile bag system measuring 66 cm in length and a pulley for easy cable extraction up to a length of 96 cm. The PULL-OUT has a natural brake when the cable is placed on the table. The weight allows for adjustment according to the cable type to reduce strain.

PULL-OUT WITH BRACED BAG AND PULLEY

A reinforced textile bag system (with reinforced sidewalls) measuring 66 cm in length and a pulley for easy cable extraction up to a length of 96 cm. The weight allows for adjustment according to the cable type to reduce strain.

LITE

LIST OF VARIANTS

LITE M, 4x SOCKET

BLACK	LIMS-4FR-B
WHITE	LIMS-4FR-W
SILVER	LIMS-4FR-S

LITE M, 3x SOCKET, USB-C/A CHARGING

BLACK	LIMS-3FR-1AC-B
WHITE	LIMS-3FR-1AC-W
SILVER	LIMS-3FR-1AC-S

LITE M, 3x SOCKET, 1x MODULE SLOT

BLACK	LIMS-3FR-B
WHITE	LIMS-3FR-W
SILVER	LIMS-3FR-S

LITE M, 2x SOCKET, USB-C/A CHARGING, 1x MODULE SLOT

BLACK	LIMS-2FR-1AC-B
WHITE	LIMS-2FR-1AC-W
SILVER	LIMS-2FR-1AC-S

LITE M, 2x SOCKET, 2x SLOT MODULE

BLACK	LIMS-2FR-B
WHITE	LIMS-2FR-W
SILVER	LIMS-2FR-S

LITE M, 1x SOCKET, USB-C/A CHARGING, 2x MODULE SLOT

BLACK	LIMS-1FR-1AC-B
WHITE	LIMS-1FR-1AC-W
SILVER	LIMS-1FR-1AC-S

LITE L, 5x SOCKET

BLACK	LILS-5FR-B
WHITE	LILS-5FR-W
SILVER	LILS-5FR-S

LITE

panconnect.

LITE L, 4x SOCKET, USB-C/A CHARGING

BLACK	LILS-4FR-1AC-B
WHITE	LILS-4FR-1AC-W
SILVER	LILS-4FR-1AC-S

LITE L, 4x SOCKET, 1x MODULE SLOT

BLACK	LILS-4FR-B
WHITE	LILS-4FR-W
SILVER	LILS-4FR-S

LITE L, 3x SOCKET, USB-C/A CHARGING, 1x MODULE SLOT

BLACK	LILS-3FR-1AC-B
WHITE	LILS-3FR-1AC-W
SILVER	LILS-3FR-1AC-S

LITE L, 3x SOCKET, 2x MODULE SLOT

BLACK	LILS-3FR-B
WHITE	LILS-3FR-W
SILVER	LILS-3FR-S

LITE L, 2x SOCKET, USB-C/A CHARGING, 2x MODULE SLOT

BLACK	LILS-2FR-1AC-B
WHITE	LILS-2FR-1AC-W
SILVER	LILS-2FR-1AC-S

LITE L, 2x SOCKET, 3x MODULE SLOT

BLACK	LILS-2FR-B
WHITE	LILS-2FR-W
SILVER	LILS-2FR-S

LITE L, 1x SOCKET, USB-C/A CHARGING, 3x MODULE SLOT

BLACK	LILS-1FR-1AC-B
WHITE	LILS-1FR-1AC-W
SILVER	LILS-1FR-1AC-S

LITE

panconnect•

CONNECTORS AND SPECIAL MODULES FOR PANEL LITE

HDMI 2.0b 4K 60Hz, (F–F, 150 mm)

BLACK	MSPC-HF-B
WHITE	MSPC-HF-W
SILVER	MSPC-HF-S

RJ45 Cat6A S/FTP, 10GBase-T (F–F, coupler)

BLACK	MSPC-LF-B
WHITE	MSPC-LF-W
SILVER	MSPC-LF-S

USB-C 3.2 gen2 10 Gbps (F–F, 150 mm)

BLACK	MSPC-CM-B
WHITE	MSPC-CM-W
SILVER	MSPC-CM-S

USB-A 3.0, 5 Gbps, (F–F, 150 mm)

BLACK	MSPC-AF-B
WHITE	MSPC-AF-W
SILVER	MSPC-AF-S

2x Cat6A S/FTP, 10GBase-T (F–F)

BLACK	MSPC-2LF-B
WHITE	MSPC-2LF-W
SILVER	MSPC-2LF-S

RJ45 Cat6A S/FTP (F–F) + HDMI 4K 60Hz (F–F)

BLACK	MSPC-HFLF-B
WHITE	MSPC-HFLF-W
SILVER	MSPC-HFLF-S

BLACK MODULE

BLACK	MSPC-BM-B
WHITE	MSPC-BM-W
SILVER	MSPC-BM-S

MULTICABLE CABLE GROMMET

BLACK	MSFLPTM-B
WHITE	MSFLPTM-W
SILVER	MSFLPTM-S

USB-C 3.2 gen2 (F–M) + HDMI 4K 60Hz (F–F)

BLACK	MSPC-HFCM-B
WHITE	MSPC-HFCM-W
SILVER	MSPC-HFCM-S

USB-A 3.0 (F–F) + HDMI 4K 60Hz (F–F)

BLACK	MSPC-HFAF-B
WHITE	MSPC-HFAF-W
SILVER	MSPC-HFAF-S

RJ45 Cat6A S/FTP (F–F) + USB-C 3.2 gen2 (F–M)

BLACK	MSPC-CMLF-B
WHITE	MSPC-CMLF-W
SILVER	MSPC-CMLF-S

RJ45 Cat6A S/FTP (F–F) + USB-A 3.0 (F–F)

BLACK	MSPC-AFLF-B
WHITE	MSPC-AFLF-W
SILVER	MSPC-AFLF-S

VGA HD 15 pin (F–F) + Audio 3,5mm, 3pin (F–F)

BLACK	MSPC-VFOF-B
WHITE	MSPC-VFOF-W
SILVER	MSPC-VFOF-S

XLR 16 A (F-direct 3pin area)

BLACK	MSPC-XM-B
WHITE	MSPC-XM-W
SILVER	MSPC-XM-S

CUSTOM MODULE (1 OR 2 CONNECTORS)

BLACK	MSPC-CUS-B
WHITE	MSPC-CUS-W
SILVER	MSPC-CUS-S

CABLE MODULE FOR PANEL LITE

MODULE WITH PASS-THRU FABRIC BAG (no cable)

PULL-OUT BAG with pulley (black)	BLACK	MPTB-EMP-B
	WHITE	MPBT-EMP-W
	SILVER	MPTB-EMP-S

MODULE WITH PULL-OUT SOFT BAG AND PULLEY (no cable)

PULL-OUT BAG with pulley (black)	BLACK	MPOS-EMP-B
PULL-OUT BAG with pulley (grey)	WHITE	MPOS-EMP-W
PULL-OUT BAG with pulley (grey)	SILVER	MPOS-EMP-S

MODULE WITH PULL-OUT BRACED BAG AND PULLEY (no cable)

PULL-OUT BAG with pulley (black)	BLACK	MPOH-EMP-B
PULL-OUT BAG with pulley (grey)	WHITE	MPOH-EMP-W
PULL-OUT BAG with pulley (grey)	SILVER	MPOH-EMP-S

LITE

panconnect•

MATRIX OF CABLE MODULES WITH CABLES FOR PANEL LITE

For each cable, it is possible to choose one of three bags, PASS-THRU without pulley, and two types of cable system PULL-OUT with pulleys.

|		PASS-THRU TEXTILE BAG	PULL-OUT WITH SOFT BAG AND PULLEY	PULL-OUT WITH BRACED BAG AND PULLEY
MODULE WITH CABLE HDMI 1.4 (MALE-MALE), 4K 30Hz, awg32/22				
HDMI (M-M), 2M	BLACK	MPTB-HMHM-20-B	MPOS-HMHM-20-B	MPOH-HMHM-20-B
	WHITE	MPTB-HMHM-20-W	MPOS-HMHM-20-W	MPOH-HMHM-20-W
	SILVER	MPTB-HMHM-20-S	MPOS-HMHM-20-S	MPOH-HMHM-20-S
HDMI (M-M), 3M	BLACK	MPTB-HMHM-30-B	MPOS-HMHM-30-B	MPOH-HMHM-30-B
	WHITE	MPTB-HMHM-30-W	MPOS-HMHM-30-W	MPOH-HMHM-30-W
	SILVER	MPTB-HMHM-30-S	MPOS-HMHM-30-S	MPOH-HMHM-30-S
MODULE WITH CABLE HDMI 1.4 (MALE-FEMALE), 4K 30Hz, awg32/22				
HDMI (M-F), 2M	BLACK	MPTB-HMHF-20-B	MPOS-HMHF-20-B	MPOH-HMHF-20-B
	WHITE	MPTB-HMHF-20-W	MPOS-HMHF-20-W	MPOH-HMHF-20-W
	SILVER	MPTB-HMHF-20-S	MPOS-HMHF-20-S	MPOH-HMHF-20-S
MODULE WITH CABLE CAT6 RJ45 (MALE-MALE), UTP, AWG26/7				
LAN Cat6 (M-M), 2M	BLACK	MPTB-LMLM-20-B	MPOS-LMLM-20-B	MPOH-LMLM-20-B
	WHITE	MPTB-LMLM-20-W	MPOS-LMLM-20-W	MPOH-LMLM-20-W
	SILVER	MPTB-LMLM-20-S	MPOS-LMLM-20-S	MPOH-LMLM-20-S
LAN Cat6 (M-M), 3M	BLACK	MPTB-LMLM-30-B	MPOS-LMLM-30-B	MPOH-LMLM-30-B
	WHITE	MPTB-LMLM-30-W	MPOS-LMLM-30-W	MPOH-LMLM-30-W
	SILVER	MPTB-LMLM-30-S	MPOS-LMLM-30-S	MPOH-LMLM-30-S
MODULE WITH CABLE USB3.0 (MALE-FEMALE), 5Gbps, AWG28/28, 9 pin				
USB-A (M-F), 2M	BLACK	MPTB-AMAF-20-B	MPOS-AMAF-20-B	MPOH-AMAF-20-B
	WHITE	MPTB-AMAF-20-W	MPOS-AMAF-20-W	MPOH-AMAF-20-W
	SILVER	MPTB-AMAF-20-S	MPOS-AMAF-20-S	MPOH-AMAF-20-S
USB-A (M-F), 3M	BLACK	MPTB-AMAF-20-B	MPOS-AMAF-20-B	MPOH-AMAF-20-B
	WHITE	MPTB-AMAF-20-W	MPOS-AMAF-20-W	MPOH-AMAF-20-W
	SILVER	MPTB-AMAF-20-S	MPOS-AMAF-20-S	MPOH-AMAF-20-S
MODULE WITH CABLE USB-C (MALE-MALE), 3.2 gen1, 10 Gbps				
USB-C (M-M), 2M	BLACK	MPTB-CMCM-20-B	MPOS-CMCM-20-B	MPOH-CMCM-20-B
	WHITE	MPTB-CMCM-20-W	MPOS-CMCM-20-W	MPOH-CMCM-20-W
	SILVER	MPTB-CMCM-20-S	MPOS-CMCM-20-S	MPOH-CMCM-20-S
USB-C (M-M), 3M	BLACK	MPTB-CMCM-30-B	MPOS-CMCM-30-B	MPOH-CMCM-30-B
	WHITE	MPTB-CMCM-30-W	MPOS-CMCM-30-W	MPOH-CMCM-30-W
	SILVER	MPTB-CMCM-30-S	MPOS-CMCM-30-S	MPOH-CMCM-30-S
MODULE WITH CABLE USB-C (MALE-FEMALE), 3.2 gen1, 10 Gbps				
USB-C (M-F), 2M	BLACK	MPTB-CMCF-20-B	MPOS-CMCF-20-B	MPOH-CMCF-20-B
	WHITE	MPTB-CMCF-20-W	MPOS-CMCF-20-W	MPOH-CMCF-20-W
	SILVER	MPTB-CMCF-20-S	MPOS-CMCF-20-S	MPOH-CMCF-20-S
MODULE WITH CABLE Apple Lightning / USB-C (MALE-MALE)				
LIGHTNING/USB-C (M-M), 2M	BLACK	MPTB-GMCM-20-B	MPOS-GMCM-20-B	MPOH-GMCM-20-B
	WHITE	MPTB-GMCM-20-W	MPOS-GMCM-20-W	MPOH-GMCM-20-W
	SILVER	MPTB-GMCM-20-S	MPOS-GMCM-20-S	MPOH-GMCM-20-S
MODULE WITH CABLE Apple Lightning / USB-A (MALE-MALE)				
LIGHTNING/USB-A (M-M), 2M	BLACK	MPTB-GMAM-20-B	MPOS-GMAM-20-B	MPOH-GMAM-20-B
	WHITE	MPTB-GMAM-20-W	MPOS-GMAM-20-W	MPOH-GMAM-20-W
	SILVER	MPTB-GMAM-20-S	MPOS-GMAM-20-S	MPOH-GMAM-20-S
MODULE WITH CABLE USB-C / HDMI (MALE-MALE)				
USB-C/HDMI (M-M), 2M	BLACK	MPTB-CMHM-20-B	MPOS-CMHM-20-B	MPOH-CMHM-20-B
	WHITE	MPTB-CMHM-20-W	MPOS-CMHM-20-W	MPOH-CMHM-20-W
	SILVER	MPTB-CMHM-20-S	MPOS-CMHM-20-S	MPOH-CMHM-20-S
MODULE WITH CABLE AUDIO (Jack 3.5mm, MALE-FEMALE)				
AUDIO (M-M), 2M	BLACK	MPTB-OMOM-20-B	MPOS-OMOM-20-B	MPOH-OMOM-20-B
	WHITE	MPTB-OMOM-20-W	MPOS-OMOM-20-W	MPOH-OMOM-20-W
	SILVER	MPTB-OMOM-20-S	MPOS-OMOM-20-S	MPOH-OMOM-20-S

LITE

panconnect•

INSTALLATION INSTRUCTIONS

The installation process for both variants is the same; they only differ in the length of the cut required.

To install the LITE panel, you will need a jigsaw and a drill with wood bits. It is also possible to use CNC milling during desk production.

1 | Mark and drill two opposite corners.
2 | Use a jigsaw to cut the shape between the holes according to the CUT-OUT in the installation instructions.
3 | Place the panel into the hole, position the frame from the bottom part of the panel, and tighten the screws (choose screws based on the thickness of the desk).
4 | Attach the PASS-THRU or PULL-OUT and connect the panel into electrical outlet.

PRODUCT PACKAGE

Panel LITE with power cable, mounting frame, mounting screws

THICKNESS OF THE DESK

10 - 40 mm (possibility up to 60 mm with custom screws , not part of a standard package)

INSTALLATION MANUAL

panconnect.eu/en/download/

ACCESSORIES FOR PANEL LITE

LITE can be expanded with a separate pass-through installed into the tabletop, designed in a colour scheme corresponding to the panel's design.

LITE SQUARE METAL PASS-THROUGH WITH BRUSHES

BLACK	LI-PTH-B
WHITE	LI-PTH-W
SILVER	LI-PTH-S

SAFETY & RECYCLATION

CE

PANCONNECT declares that panel MOVE complies with Low voltage directive 2014/35/EU and EMC directive 2014/30/EU. Testing has been made according to EN 50491-5-1:2010 and EN 50491-5-2:2010 standards.

All products from PANCONNECT are intended for upgrade or recyclation in accordance with the company's policy. Before the disposal of this panel comes up, please verify if this product can or cannot be upgraded or overhauled. If it's not possible, kindly arrange the disposal in accordance with valid EU directives.

This product belongs to WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) category so the disposal is possible only in accordance with this WEEE Directive 2012/19/EU.
It cannot be part of the municipal waste. For more information please check www.asekol.cz | info@asekol.cz

ABOUT MANUFACTURER

panconnect•

PANCONNECT s.r.o.
Olomoucká 601/51, 618 00 Brno
Pobřežní 249/46, 186 00 Praha
ID: 29265703, VAT ID: CZ29265703

sales@panconnect.eu, +420 603 575 486
support@panconnect.eu, +420 731 145 272
web: www.panconnect.eu
portal and configurator: pro.panconnect.eu